


# Honeycomb Waveguide Vent



## Features:


- ◆ Available in 3/16" and 1/8" cell size
- ◆ Flange mounting allows for field location and installation into an existing room.
- ◆ Minimal air flow resistance and pressure drop.
- ◆ Continuously solder fused for superior strength and RF performance

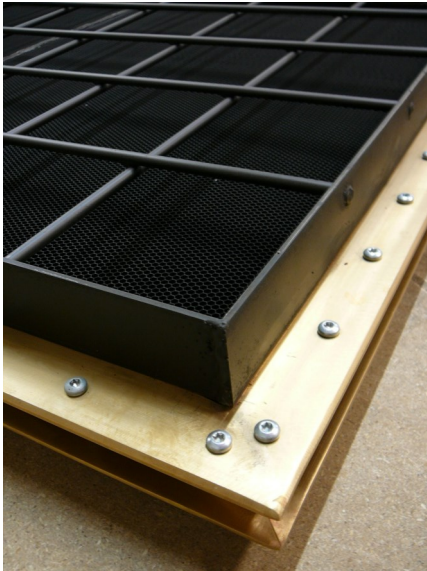

Cell Size	100dB ATTENUATION
3/16"	10 GHz
1/8"	40 GHz

## Options:

- ◆ Custom sizes available.
- ◆ Dielectric "non-conductive" collar to accommodate the interconnection of metal ducts. Required to maintain the single point ground of the RF shielded enclosure.
- ◆ Round configurations
- ◆ Security bars

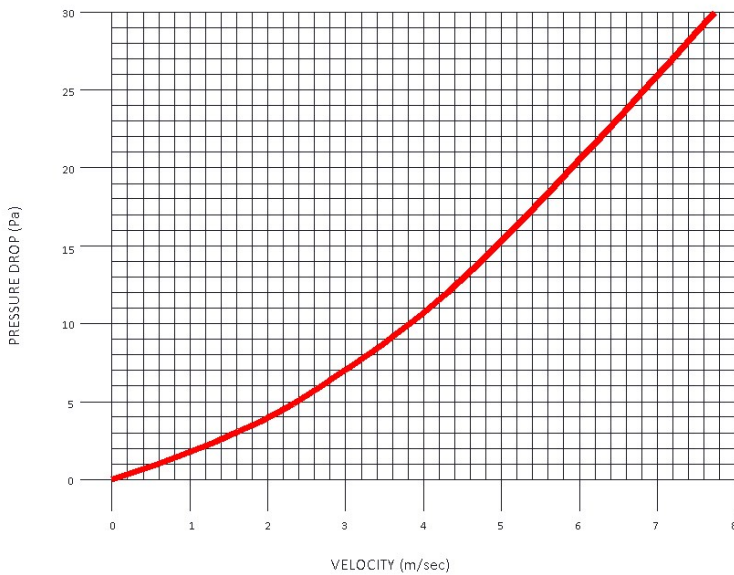

AVERAGE  
AMBIENT TEST  
CONDITIONS  
dB = 21.7 C °  
wb = 17.3 C °  
Bp = 99.73 kPa

WAVEGUIDE VENT STATIC PRESSURE DROP

